



Custom Jetted Tubzz builds the most elegant, comfortable, and highest quality tubs available today. Manufactured of 100% acrylic, our tubs are the thickest and strongest in the industry. All tubs are pre-leveled

and framed to make installation quicker and easier. We also offer many styles and colors from which to choose. Comfort, convenience, and quality: the reasons we are the rising star in the industry.

[www.tubzz.com](http://www.tubzz.com)

# IMPORTANT SAFETY INSTRUCTIONS

Pertaining to a risk of fire, electric shock, or injury to persons

**WARNING:** Whirlpool bathtubs utilize acrylic and fiberglass materials (which are inherently slippery surfaces), electricity, water, air pressure and suction. The following basic safety precautions should always be followed when using your bathtub:

- 1. CAREFULLY READ AND FOLLOW ALL INSTRUCTIONS BEFORE ATTEMPTING TO OPERATE YOUR WHIRLPOOL BATHTUB.**
- Prior to installation:
  - Remove protective plastic and packaging and carefully inspect for any damage.
  - Check tub for correct model name, size, color and trim finish.
- Although the bathtub employs a skid resistant bottom surface, caution should always be exercised when entering or exiting the bathtub.
- DANGER:** To reduce the risk of injury, do not permit children or persons with a disability to use this unit unless they are closely supervised at all times.
- This product is intended for indoor use only. Use the bathtub only for its intended purpose as described in this manual and do not use attachments or accessories which are not recommended by the manufacturer.
- Never drop or insert any objects into any openings.
- Persons with long hair should wear a bathing cap when using the bathtub.
- Do not use the bathtub without the suction cover in place.
- The bathtub must be connected to an electrical supply circuit that is protected by a ground fault circuit interrupter (GFCI) which is provided by the installer. The GFCI should be tested periodically to ensure that is working properly.
- Keep all appliances, such as radios and hairdryers, a safe distance from the bathtub.
- (For permanently connected units) A green colored terminal (or a wire connector marked "G", "GR", "Ground", or "Grounding") is provided within the terminal compartment. To reduce the risk of electrical shock, connect this terminal or connector to the grounding terminal of your electric service or supply panel with a conductor equivalent in size to the circuit conductors supplying this equipment.
- Failure to comply with all instructions, requirements and warnings contained in this manual creates a serious hazard to the bathtub user and may result in serious injury.
- 13. Save these instructions.**

**WARNING:** The causes, symptoms, and effects of hyperthermia may be described as follows: Hyperthermia occurs when the internal temperature of the body reaches a level several degrees above the normal body temperature of 98.6. The symptoms of hyperthermia include an increase in the internal temperature of the body, dizziness, lethargy, drowsiness, and fainting. The effects of hyperthermia include (1) failure to perceive heat, (2) failure to recognize the need to exit the spa or hot tub, (3) unawareness of impending hazard, (4) fetal damage to pregnant women, (5) physical inability to exit the spa or hot tub, and (6) unconsciousness resulting in the danger of drowning.

**WARNING:** The use of alcohol, drugs, or medication can greatly increase the risk of fatal hyperthermia.

# INSTALLATION INSTRUCTIONS

**Baths are assembled complete and ready for installation. Immediately upon receiving the bath and removal of packing, INSPECT the unit for freight damage.**

Any claims for damage, whether apparent or hidden, must be made to the carrier immediately, in order for them to assume all associated costs. Should inspection reveal any defect in the finish, **do not install the bath.** Damage or defect to the finish claimed after the bath is installed is excluded from the warranty. The warranty DOES NOT cover labor or materials to remove or re-install the bath.

## **PRIOR TO INSTALLATION CHECK TO ENSURE THAT:**

1. The installation will conform with all applicable Federal, State and Local Building Codes & Regulations;
2. The unit is the correct model and color;
3. There has been no shipping damage;
4. The “notice” or “warning” tags on the bathtub have been read and thoroughly understood;
5. The interior of the tub will be protected during installation;
6. Make sure sub floor is level.

## **DURING INSTALLATION CHECK TO ENSURE THAT:**

1. Bathtub is not hanging from the rim. Bath must be supported from the floor.
2. An access panel with minimum dimensions of 16” height by 20” width is required at the pump end of the bathtub to allow for pump accessibility in the event that maintenance or servicing is necessary. The area surrounding the pump must have additional support for each seat.
3. All bathtubs with seats must have additional support for each seat.
4. All building materials and wiring should be routed away from the pump body or other heat producing components of the unit.
5. Bathtubs with combination whirlpool, in-line heater or airbath systems may require 2 access panels and 2 electrical lines.

# INSTALLATION INSTRUCTIONS

**Manufacturer recommends a dedicated 20 amp circuit breaker for each power cord supplied on your whirlpool bathtub. The unit must be connected only to a supply circuit that is protected by a GFCI and should be tested on a routine basis.**

1. Supply 110 Volt electrical outlet. This circuit must be protected by a ground fault circuit interrupter (GFCI).
2. Plug supply cord(s) into electrical outlet.
3. To test the GFCI, do the following:
  - a. Push the test button;
  - b. Check to see that power has been interrupted;
  - c. Push the reset button;
  - d. Check to see that power has been restored.




If the GFCI does not operate properly during the test, there is a ground current flowing indicating the risk of electric shock. Do not use this unit. Disconnect the unit and have the problem corrected by a qualified service representative before using.

# BATHTUB INSTALLATION

Choose the installation option that applies to your particular installation and follow the instructions. Be sure to take any necessary precautions to keep tub protected during installation.

## Complete Bath Installation:

Level the bathtub in both directions, using a 4 ft. level, to ensure proper drainage. Bring the tile or finished surface to tub deck and then seal. Seal edges as shown.

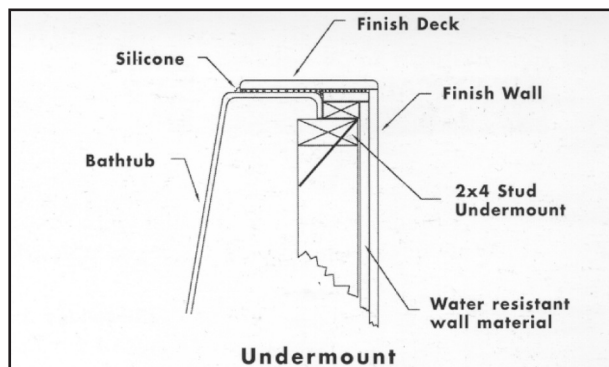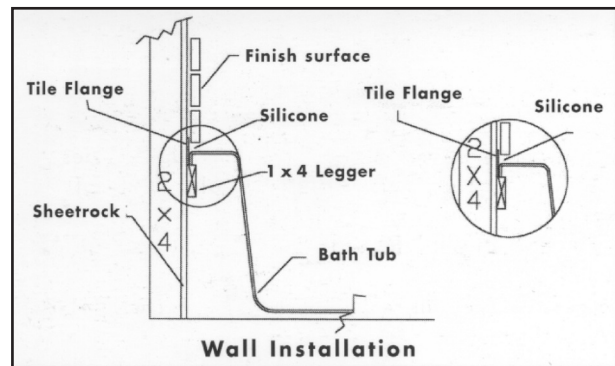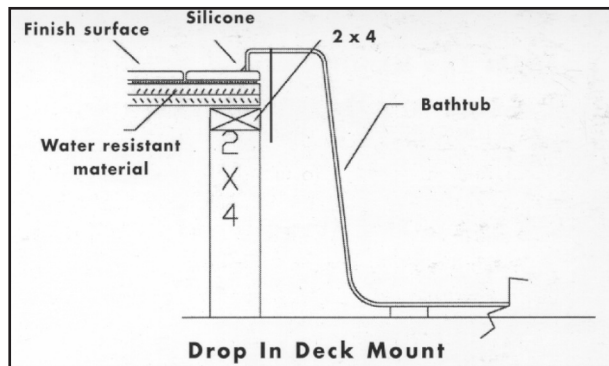

## Clean-Up After Installation:

When cleaning up after installation, do not use abrasive cleansers as they may scratch and dull the surface. Use warm water and a liquid non-abrasive detergent to clean the surface.

Stubborn stains, paint or tar can be removed with turpentine or paint thinner. Do not allow cleaners containing petroleum distillates to remain in contact with bath surface for long periods of time. Plaster can be removed by scraping with a wood edge. Do not use metal scrapers, wire brushes, or other metal tools. One of the powder-type detergents may be used on a damp cloth to provide mild abrasive action to the residual plaster.

# TESTING SYSTEM OPERATION

**To check proper function of your newly installed whirlpool bathtub, take the following steps:**

1. Remove all debris and residue before filling the tub with water.
2. Fill the tub with water until the highest whirlpool jet is covered by at least 2" of water ( do not run pump without water in the tub).
3. Examine tub and system carefully for leaks.
4. Position all jets downward.
5. Turn on system and allow tub to run approximately 2-3 minutes.
6. Allow water to sit for 10 minutes and check for leaks.
7. Repeat step 5 three times to assure pump is priming properly.
8. Open drain and empty tub.
9. Wipe up excess water with a soft, damp sponge.

When cleaning up after installation do not use abrasive cleaners, steel wool, scouring pads or harsh chemicals. For cleaning procedures refer to the "Care and Maintenance" section.

## **Care and Maintenance**

Soap residues and mineral deposits are the enemies of your bathtub, particularly in areas where there is hard water. However, by cleaning your bathtub at regular intervals and using proper cleaning agents, you can help your bathtub retain its original sparkling look. **DO NOT USE** abrasive cleaners, as these products will damage the bathtub surface and metallic finishes. A non-abrasive cleaner is recommended.

Your bathtub does not require the use of special cleaning agents or chemicals.

- Normal cleaning is simple and easy. Just use warm water, a soft sponge and mild liquid detergent or non-abrasive cleaner to wipe the surface clean, then rinse thoroughly.
- To preserve the surface finish, annual waxing is recommended. Use a high-grade paste-type automotive wax.
- Manufacturer recommends the use of **JET FRESH®** Whirlpool and Airbath cleaner to maintain your Whirlpool or Airbath system.

# LIMITED WARRANTY

All Custom Jetted Tubzz are covered by a limited warranty to the first consumer for a period of 60 months as to the tub and 12 months as to the electronics and accessories, from date of original purchase against defect in manufacture, provided its use is limited to personal, family or household purposes, it is installed and maintained according to Custom Jetted Tubzz recommended installation and maintenance procedures, and the defects are not caused by unauthorized and unreasonable use. This warranty does not cover defects, damage, or failure caused by the freight carrier, installer, user or other person, or resulting from, without limitation, any of the following: improper handling, modification of any type, improper installation, misuse, incorrect operation or lack of proper routine maintenance (including abrasive or improper cleaners).

This warranty does not extend to subsequent owners, transferees or users. It is limited to repair or replacement of the defect without charge at the factory of Tubzz. It does not cover the expense of shipment to or from the factory, except where provided by applicable law.

Upon discovery of a defect or malfunction, notify Custom Jetted Tubzz in writing within 10 days of discovery, setting forth a description of the malfunction or defect, the name and address of installer, and date and address of installation.

This warranty gives you specific legal rights, and you may also have rights which vary from state to state.